

OPERATING INSTRUCTIONS




**Design &
Manufacturing Ltd.**

SERIES 58300 LINE DART




INSTALLATION

1. Feed the line to be blown through the control valve and through the duct seal device.
2. Attach the line to the eye on the rear of the dart. Insert the dart into the duct.



3. Install the duct seal device in the end of the duct. Connect the control valve and begin blowing.

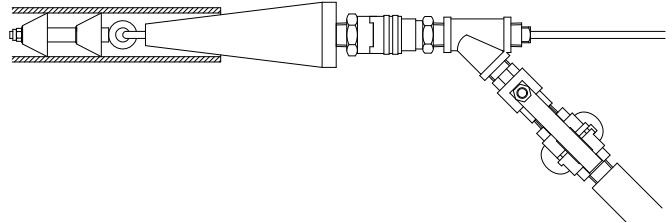

SAFETY



1. Ensure that the duct seal device is securely installed before opening the control valve handle.
2. Never use a worn, defective or incomplete component. Ensure that all components of the system are able to withstand the maximum system pressures. Components not rated for the system pressure may fail and release the stored energy.
3. Be prepared for the unexpected. Use recognized safety practices and wear recognized safety equipment.

SERVICE



1. There are no service or maintenance procedures for this product. Replacement cones are available as separate items.